


AVIKO (0306; 0610; 1014; 1419; 1830) WET



\*Illustration represents AVIKO 0306 G3 WET

SIDE VIEW

FRONT VIEW

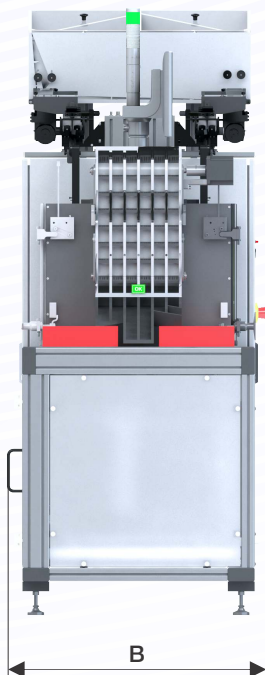

## AVIKO (0306; 0610; 1014; 1419; 1830) WET

### TECHNICAL SPECIFICATIONS

#### AVIKO (0306, 0610, 1014, 1419) WET

Dimensions (AxBxC) (mm)	2 030 × 700 × 1 850
Netto / Brutto	400 / 650 kg
Input Power (230V)	230V, 50Hz/60Hz (E plug)
Input Power (110V)	110V, 50Hz/60Hz (B plug)
Main Fuse	T6.3A (230V); T10A (110V)
Transport box (WxDxH) (mm)	2 130 × 1 000 × 1 950 (mm)

\* AVIKO 1830 G2 WET = TBD

### SCAN SPEED

AVIKO 0306 WET				AVIKO 0610 WET				AVIKO 1014 WET			
BALL Ø [mm]	BALL Ø [inch]	SCAN SPEED STD [pcs/hr]	SCAN SPEED AS [pcs/hr]	BALL Ø [mm]	BALL Ø [inch]	SCAN SPEED STD [pcs/hr]	SCAN SPEED AS [pcs/hr]	BALL Ø [mm]	BALL Ø [inch]	SCAN SPEED STD [pcs/hr]	SCAN SPEED AS [pcs/hr]
2,778	7/64	20 600	19 200	5,556	7/32	20 100	13 900	9,525	3/8	14 200	12 300
3,000	-	20 200	18 700	5,953	15/64	19 300	13 200	10,000	-	13 700	11 900
3,175	1/8	20 000	18 400	6,000	-	19 100	13 200	10,319	-	13 300	11 500
3,500	-	19 400	17 800	6,350	1/4	18 500	12 600	10,500	13/32	13 400	11 700
3,969	5/32	18 700	17 000	6,746	17/64	17 700	12 100	11,113	7/16	12 000	10 200
4,000	-	18 600	16 900	7,000	-	17 300	11 700	11,500	-	11 700	9 900
4,500	-	17 900	16 200	7,144	9/32	17 100	11 500	11,906	15/32	11 400	9 700
4,763	3/16	17 500	15 800	7,938	5/16	15 800	10 600	12,303	31/64	10 200	8 500
5,000	-	17 200	15 400	8,500	-	15 200	10 000	12,700	1/2	10 000	8 300
5,556	7/32	16 500	14 700	8,731	11/32	14 900	9 800	13,000	-	9 800	8 200
6,000	-	16 000	14 200	9,000	-	14 400	9 500	13,491	17/32	9 500	7 700
6,350	1/4	15 600	13 800	9,525	3/8	13 900	9 100	14,288	9/16	8 600	7 400
				10,000	-	13 400	8 800	14,600	-	8 400	6 600
				10,319	13/32	13 100	8 500				

AVIKO 1419 WET				AVIKO 1830 WET			
BALL Ø [mm]	BALL Ø [inch]	SCAN SPEED STD [pcs/hr]	SCAN SPEED AS [pcs/hr]	BALL Ø [mm]	BALL Ø [inch]	SCAN SPEED STD [pcs/hr]	SCAN SPEED AS [pcs/hr]
13,491	17/32	9 300	7 700	18,000	-	5 600	4 300
14,288	9/16	8 400	7 300	18,256	23/32	5 500	4 200
15,081	19/32	7 700	6 400	19,050	3/4	5 200	4 100
15,000	-	7 700	6 400	19,844	25/32	5 000	3 900
15,500	-	7 400	6 200	20,000	-	4 900	3 600
15,875	5/8	7 300	6 000	20,638	13/16	4 600	3 500
16,400	-	6 400	5 400	21,000	-	4 500	3 400
16,669	21/32	6 300	5 300	21,431	27/32	4 400	3 400
17,150	-	6 200	5 200	22,225	7/8	4 100	3 200
17,463	11/16	6 100	5 100	23,019	19/32	3 900	2 900
18,000	-	5 900	5 000	23,813	15/16	3 700	2 800
18,256	23/32	5 800	4 900	24,606	31/32	3 500	2 700
18,550	-	5 800	4 800	25,000	-	3 300	2 600
19,050	3/4	5 600	4 700	25,400	1	3 300	2 600
				26,988	1-1/16	3 000	2 400
				28,575	1-1/8	2 700	2 200
				30,163	1-3/16	2 500	2 000

\* Scan speed is calculated for both sides working in unison. (same diameter)

### ORDER INFORMATION

MODEL	SORTING DIAMETER	ORDER NUMBER
AVIKO 0306 G3 WET	2,778 - 6,350	K 092 000
AVIKO 0610 G3 WET	5,556 - 10,319	K 092 200
AVIKO 1014 G3 WET	9,500 - 14,286	K 092 400
AVIKO 1419 G3 WET	13,494 - 19,050	K 092 600
AVIKO 1830 G3 WET	18,000 - 30,163	K 092 800