



AVIKO 2045 G2

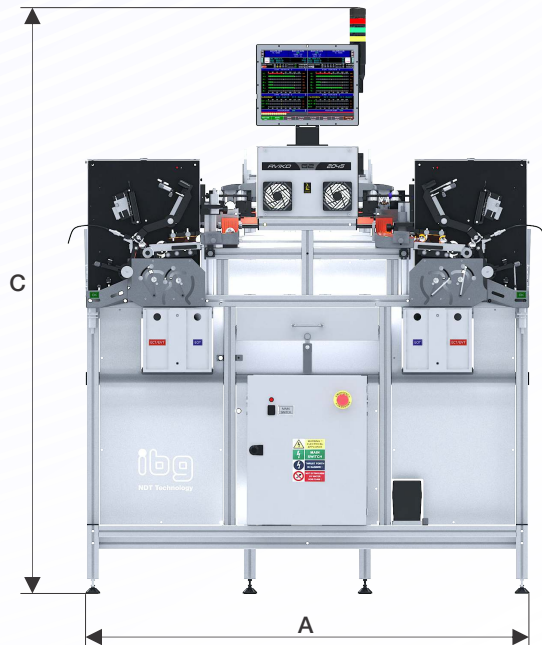

SIDE VIEW

FRONT VIEW

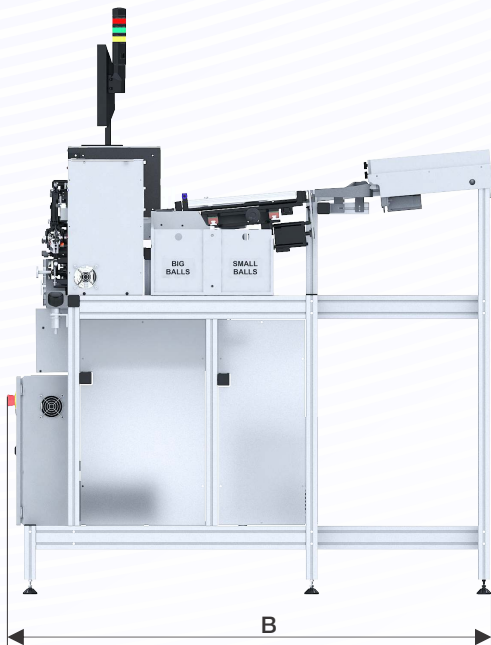

## AVIKO 2045 G2

AVIKO 2045	
Dimensions (AxBxC)	1 500 × 1 630 × 1 970 (mm)
Netto / Brutto	350 / 545 (kg)
Transport box (WxDxH)	1 644 × 1 194 × 1 744 (mm)
Input Power (230V)	230V, 50Hz/60Hz (E plug)
Input Power (110V)	110V, 50Hz/60Hz (B plug)
Main Fuse	T6.3A (230V); T10A (110V)

## SCAN SPEED

AVIKO 2045		
BALL Ø [mm]	BALL Ø [inch]	SCAN SPEED AS [pcs/hr]
19,844	25/32	4 500
20,000	-	4 500
20,638	13/16	4 300
21,000	-	4 300
21,431	27/32	4 200
22,225	7/8	4 000
23,019	19/32	3 900
23,813	15/16	3 800
24,606	31/32	3 800
25,000	-	3 500
25,400	1	3 500
26,988	1-1/16	3 300
28,575	1-1/8	3 100
30,000	-	2 900
30,163	1-3/16	2 900
31,750	1-1/4	2 700
33,338	1-5/16	2 500
34,000	-	2 400
34,925	1-3/8	2 300
36,513	1-7/16	2 200
37,306	1-15/32	2 100
38,100	1-1/2	2 100
39,688	1-9/16	1 900
40,000	-	1 900
41,275	1-5/8	1 800
42,000	-	1 800
42,862	1-11/16	1 700
43,656	1-23/32	1 700
44,450	1-3/4	1 600
45,000	-	1 600
46,038	1-13/16	1 500

\* Scan speed is calculated for both sides working in unison.

## ORDER INFORMATION

MODEL	SORTING DIAMETER	ORDER NUMBER
AVIKO 2045 G2	19,844 - 46,038	K 081 000